

# FLIGHT<sup>®</sup> 403P-2

## Dual-laser Series

Maximized Production Speed & Turn-over Rate

[www.farsoon.com](http://www.farsoon.com)



### FIBER

Equipped with powerful fiber lasers in place of the standard CO<sub>2</sub> lasers, Flight<sup>®</sup> 403P-2 Series is capable of delivering greatly increased power to the powder bed. Due to the more robust and stable nature of a fiber laser system, Flight<sup>®</sup> Technology also provides improved laser longevity which is key when considering ROI for manufacturing applications.

### FAST

With robust laser power, improved energy distribution to the material, and smaller laser spot size, Flight<sup>®</sup> Technology is able to achieve the full sintering of powder in a significant short amount of time. With scanning speed of over 20m/s (66 ft/s) as well as the large build volume, Flight<sup>®</sup> 403P-2 Series is able to achieve extreme sintering speeds that pushes the additive manufacturing productivity to a new level.

### OPEN PLATFORM

Like all Farsoon systems, FLIGHT<sup>®</sup> 403P-2 Series is offered with fully open machine parameters and unlocked material choices. In addition with its increased power and energy absorption characteristics Flight<sup>®</sup> Technology will be capable of accessing a much different range of process-able materials and operational flexibility as compared to standard laser sintering systems, which allows for increased freedom for future AM material and application development.

### DUAL-LASER CONFIGURATION

To further increase the manufacturing turn-over rate, the dual-laser configuration for Flight<sup>®</sup> technology takes advantage of two powerful 300-watt Fiber lasers and two dynamic optical systems, creating two ultra-fine laser spots with fast scanning speed. The new dual-laser configuration can offer significantly 50-90% higher production volume rate compared to the single laser configuration of Flight<sup>®</sup> Technology, and 3 to 4 times production yield compared to a single CO<sub>2</sub> laser machine.


# FLIGHT<sup>®</sup> 403P-2 Dual-laser Series

SPECIFICATIONS	FLIGHT <sup>®</sup> SS403P-2	FLIGHT <sup>®</sup> HT403P-2
<b>External Dimensions (L×W×H)</b>	2470×1500×2185 mm (97.2×59.1×86.0 in)	
<b>Build Cylinder Size<sup>1</sup> (L×W×H)</b>	400×400×450 mm (15.7 × 15.7 × 17.7 in) or 400×400×540 mm (15.7 × 15.7 × 21.3 in)	
<b>Net Weight</b>	Approx. 3060 kg (6746.1 lb)	
<b>Laser Type</b>	Fiber Lasers, 2×300W	
<b>Scanner</b>	High-precision three-axis galvo system	
<b>Layer Thickness</b>	0.06 - 0.3 mm (0.0024-0.0118 in)	
<b>Volume Build Rate<sup>2</sup></b>	Up to 9 L/h	
<b>Scanning Speed</b>	Max. 20 m/s (65.6 ft/s)	
<b>Max. Chamber Temperature</b>	190°C (374 °F)	220°C (428 °F)
<b>Thermal Field Control</b>	Eight-zone heater & intelligent temperature control systems	
<b>Temperature Regulation</b>	Continuous real-time build surface temperature monitoring & optimization	
<b>Operating System</b>	64 bit Windows 10	
<b>Comprehensive Software</b>	BuildStar, MakeStar <sup>®</sup>	
<b>Data File Format</b>	STL	
<b>Key Software Features</b>	Open machine key parameters, real-time build parameter modification, three-dimensional visualization, diagnostic functions	
<b>Inert Gas Protection</b>	Nitrogen	
<b>Power Supply</b>	EUR/China: 400V±10%, 3~/N/PE, 50/60Hz, 32A US: transformer sold with machine	
<b>Operating Ambient Temperature</b>	22 - 28 °C (71.6-82.4 °F)	
<b>Materials</b>	FS3300PA-F, FS3401GB-F, FS3201PA-F, LUVOSINT <sup>®</sup> TPU X92A-1064 WT, more materials to come	

1 The functional build volume depends on the parts/materials.

2 Volume build rate depends on the parts/materials.

Many factors may affect the performance characteristics of products. We recommend that you make tests to determine the suitability of a product for your particular purpose prior to use. Farsoon makes no warranties of any type, express or implied, including but not limited to, the warranties of merchantability or fitness for a particular use. This also applies regarding the consideration of possible intellectual property rights as well as laws and regulations. Farsoon reserves the right to change the technical data without notice. Farsoon<sup>®</sup>, BuildStar<sup>®</sup>, MakeStar<sup>®</sup> are registered trademarks of Farsoon Technologies. Last Change: 2022-08

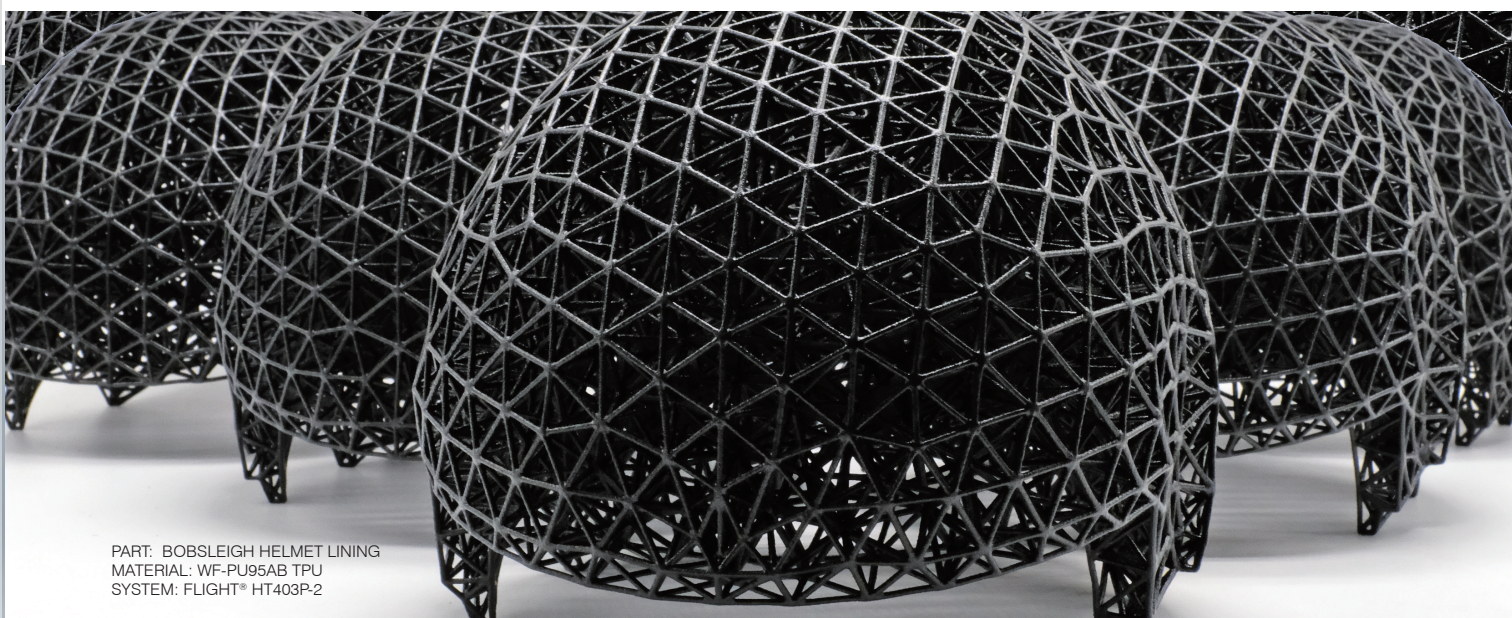

PART: BOBSLEIGH HELMET LINING  
MATERIAL: WF-PU95AB TPU  
SYSTEM: FLIGHT<sup>®</sup> HT403P-2

[www.farsoon.com](http://www.farsoon.com)

AMEA Farsoon Technologies Co., Ltd. | +86.731.8397.6198 | [globalinfo@farsoon.com](mailto:globalinfo@farsoon.com) | No. 181 Linyu Road, Changsha National High-Tech Industrial Zone, Hunan, China

AMERICAS Farsoon Americas CORP. | +1 512-551-9901 | [info@farsoonam.com](mailto:info@farsoonam.com) | 3161 Eagles Nest Street, Suite 350, Round Rock, TX 78665

EUROPE Farsoon Europe GmbH | +49 711 13796 0 | [wehelpyou@farsoon-eu.com](mailto:wehelpyou@farsoon-eu.com) | Liebknechtstrasse 33, 70565 Stuttgart, Germany